


HI耐衝擊UPVC塑膠管規格表(可撓性活套)

標稱管徑		平均外徑	近似內徑	最小厚度	長度	有效長度	每支牌價
HIW, HIB40	1 1/2"	48mm	40mm	3.7mm	7.15m	7m	1,060.7
HIW, HIB50	2"	60mm	51mm	4.1mm	7.15m	7m	1,507.3
HIW, HIB65	2 1/2"	76mm	67mm	4.1mm	7.15m	7m	1,945.4
HIW, HIB80	3"	89mm	77mm	5.5mm	7.15m	7m	3,000.6
HIW, HIB100	4"	114mm	100mm	6.6mm	7.17m	7m	4,671.3
HIW125	5"	140mm	125mm	7.0mm	7.2m	7m	6,573.4
HIW, HIB150	6"	165mm	146mm	9.0mm	7.22m	7m	9,238.1
HIW, HIB200	8"	216mm	194mm	10.8mm	7.25m	7m	14,288.4
HIW, HIB250	10"	267mm	239mm	13.3mm	7.3m	7m	22,367.4
HIW, HIB300	12"	318mm	285mm	15.9mm	7.5m	7m	32,002.0
HIW, HIB350	14"	370mm	332mm	18.0mm	7.55m	7m	43,295.2
HIW, HIB400	16"	420mm	376mm	20.5mm	7.6m	7m	56,014.5
可撓性活套簡圖							
							

"最小厚度" 轉載自CNS規範

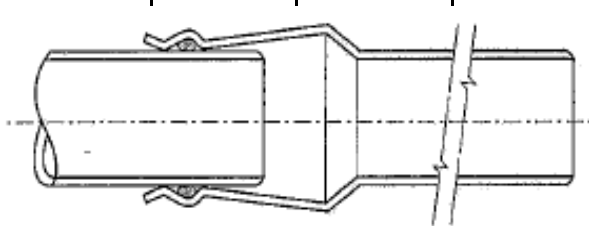

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION